


**COLLECTION | CHEVRON**  
**COLOR | NATURAL**

Wood species | American Walnut  
Grade | Select & Better  
Constructions | 3-layer T&G Engineered Flooring  
Size | 19,05 x 190 x 438,78 mm (¾" x 7½" x 17¼")  
Finish | Lacquer finish

**CONSTRUCTION : 3-LAYER T&G ENGINEERED FLOORING**

DIMENSIONS :	
Thickness	19,05 mm (¾")
Width	190 mm (7½")
Length	438,78 mm (17¼")
Cut angle	60°
Microbevel	0,5 mm
Joint type	tongue and groove (T&G)

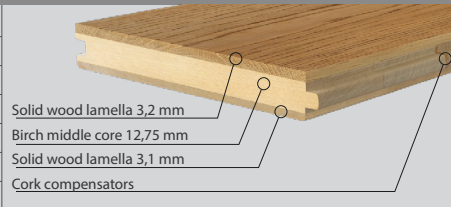

PACKAGING :	BOX	PALLET
	Content:	1,667 m <sup>2</sup>
Weight	21 kg	645 kg
H x W x L	194 x 396 x 576 mm	1105 x 800 x 1750 mm
Content:	17,90 sq.ft.	537,00 sq.ft.
Weight	46 lb	1427 lb
H x W x L	8" x 16" x 23"	44" x 32" x 69"

**DEVIATIONS :**

Deviation on Thickness	± 0,2 mm	
Deviation on Width	± 0,2 mm	EN 13489
Height Difference	≤ 0,2 % of width	ГОСТ 862.3
Cup	≤ 0,2 % of plank width	СТБ 2121
Bow	≤ 0,1 % of length	
Spring	≤ 0,5 % of length	EN 13489

**CHARACTERISTICS :**

Fire resistance	Dfl-s1	
Formaldehyde emission class	E1	
Pentachlorophenol content	None	EN 14342
Thermal resistance	0,118 m <sup>2</sup> ·K/W	
Thermal conductivity	0,161 W/(m·K)	
Structural warranty	Lifetime	

**INSTALLATION :**



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor.  
Applicable above, on and below ground level.

**STORAGE AND USAGE :**



— Air humidity 40% – 65%  
— Temperature +18 °C – +22 °C

**FINISH : LACQUER FINISH**

DESCRIPTION :	
Type of coating	UV-curable polyurethane-acrylate with micro-corundum
Surface (finish) type	Closed pores
Sheen	Semigloss 30-40 GU/60°
Finish warranty	25 years

**CLASSIFICATION SURFACE CHARACTERISTICS :**

Wear resistance	Taber Test - 500 turns (S 42; 1000 gr)	EN 438-2
Scratch resistance	Rating 3	EN 438
Slip resistance	46 (SRV dry)	EN 15676
Resistance to chemical agents	Class 5 (Except blue ink)	EN 13442
Repairability	Low	

**MAINTENANCE AND CARE CONDITIONS :**

Maintenance of hardwood floors with lacquer CosNanoTech+ finish assumes regular (daily if necessary) cleaning from dust and dirt using a vacuum, followed by a thorough cleaning using Coswick hardwood floor cleaner or other similar product. Due to high wear resistance properties, CosNanoTech+ lacquer finish does not require any additional care or finish renewal throughout the entire life of the floor.

**GRADE : SELECT & BETTER**

DESCRIPTION :		DESCRIPTION :	
Sound sapwood	Permitted non-contrasting up to 25% of the plank area	Bark pocket	Permitted up to 10 mm in length, up to 3 mm in width, filled
Colour variation	Permitted slight colour variation	Pith	Permitted healthy heart
Knot	Permitted up to 10 mm, filled	Slope of grain	Permitted
Checks	Not permitted	Medullary ray	Permitted