
HERRINGBONE 90⁰ I TECHNICAL INFORMATION

Product # 1171-1591-10

COSWICK
Solid Hardwood Floors






GREY SHADOW COLLECTION
DECOR | PAYNE'S GREY

Wood species | Oak
Selection | Select & Better
Pattern | Herringbone
Constructions | 3-layer flooring T&G
Size | 15x82,55x577.85 mm (5/8"x3 1/4"x22 3/4")
Finish | Silk mat finish

CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :	
Thickness	15 mm (5/8")
Width	82,55 mm (3 1/4")
Length	577.85 mm (22 3/4")
Cut angle	90°
Microbevel	0,5 mm
Joint type	T&G

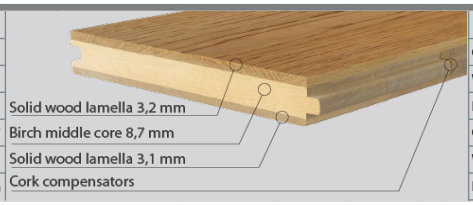

PACKAGING :	BOX	PALLET
Content	1,908 m2	54 box (103,032 m2)
Weigh	20 kg	1094 kg
H x W x L	155 x 345 x 620 mm	1080 x 1 065 x 2 020 mm
Content	20,530 sq.ft.	1108,624 sq.ft.
Weigh	21 lb	1118 lb
H x W x L	6" x 14" x 25" mm	43" x 42" x 80" mm

DEVIATIONS:		
Deviation on Thickness	± 0,2 mm	
Deviation on Length	± 0,3 mm	EN 13489
Deviation on Width	± 0,2 mm	ГОСТ 862.3
Height Difference	≤ 0,2 mm on 100 mm length	
Cup	≤ 0,2 % of width	
Bow	≤ 0,5 % of length	EN 13489
Spring	≤ 0,1 % of length	


CHARACTERISTICS:		
Fire resistance	Dfl-s1	
Formaldehyde emission class	E1	
Pentachlorophenol content	None	EN 14342
Thermal resistance	0,095 m2 K/W	
Thermal conductivity	0,158 W/(m·K)	
Structural warranty	Lifetime	

УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%
— Temperature +18 °C – +22 °C

FINISH : SILK MAT FINISH

DESCRIPTION :	
Type of coating	UV-cured modified polyurethane-acrylate
Surface (finish) type	Semi-closed pores, wire brushed
Sheen	Matte, 2–7 GU/60°
Finish warranty	-

CLASSIFICATION SURFACE CHARACTERISTICS:		
Wear resistance	Not rated	EN 438-2
Scratch resistance	Not rated	EN 438
Slip resistance	50 (SRV dry)	EN 15676
Resistance to chemical agents	Class 5 (Except blue ink)	EN 13442
Repairability	Medium	

MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with Silk finish assumes regular (daily if necessary) cleaning from dust and grit using a vacuum, followed by a thorough cleaning with Coswick Hardwood Floor Cleaner or other similar product. Floor surface areas that receive the most traffic and get worn down quicker, such as areas by the front door, hallways, kitchens etc., should be periodically renewed with special Coswick Restorative Oil. This product restores the protective surface film. Frequency of use depends on type of interior and intensity of foot traffic. For residential interiors, restorative cleaning should be done once in 3-5 years; for public and commercial interiors with intense foot traffic, it is recommended to use the product 2-4 times a year.

GRADE : SELECT & BETTER

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Non-contrasting sapwood is allowed up to 25% of plank area	Bark pocket	Permitted up to 10 mm in lenght, up to 3 mm in width, filled
Colour variation	Permitted slight colour variation	Pith	Permitted healthy heart
Knot	Permitted up to 10 mm, filled	Slope of grain	Permitted
Crecks	Not permitted	Medullary ray	Permitted

COSWICK Ltd.
2B Kolasa Str., 223034 Zaslavl, Republic of Belarus
Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com
www.coswick.com

nwfa National Wood Flooring Association · ECO FRIENDLY No added formaldehyde · СТБ ISO 9001 · TP BY · CE