

COSWICK SPORTS FLOORING

Tournament Pro Sport®

Manufactured from natural wood, Tournament Pro Sport® floors have high technical charactertistics and are intended for interiors used for training and hosting competitions of all levels, including local and international events, in basketball, volleyball, handball, squash etc.



Coawick solid sports flooring
(thickness 19,05 mm)
Plywood
(thickness 9 mm)
Bracket

Coswick resilient batten
(thickness 27 mm)
Shock absorbing element of variable rigidity
(thickness 16 mm)

Hydroisolating polyethylene film

Base

Intended Use

Product is intended for speciality indoor courts used for team sports and ball games; recommended for interiors with strict requirements in regards to the technical characteristics of the floor.

Technology

Solid wood fooring planks, manufactured from hardwood species, installed over custom shock-absorbing, anti-vibrational base. Product has "deck"-style surface pattern.

Compliance with

Shock absorption, % Vertical deformation, mm Friction, nominal unit Ball bounce, % Rolling load, mm 66 | EN 14808 (A4 ≥55% <75%)

3,5 | EN 14809 (A4 ≥2,3 <5,0)

94 | EN 13036-4 (80-110)

91 | EN 12235 (≥90%)

0,21 | EN 1569 (≤ 0,5 mm, min. 1500 H)

Top Layer

Species Construction Dimensions Oak, ash

Solid hardwood flooring

19,05x57,15 (82,55) x300...1850 mm

Subfloor

Highly durable plywood base over resilient battens and shock-absorbing anti-vibrational elements and viariable rigidity.

System Type

Permanent stationary system, installed using floating method.


Warranties

Lifetime Structural Integrity Warranty


Coswick Ltd. Republic of Belarus 2B Kolasa Str. 223034 Zaslavl Tel. +375-17-543-2020 E-mail: sales@coswick.com

www.coswick.com

Baseboard and Reducer

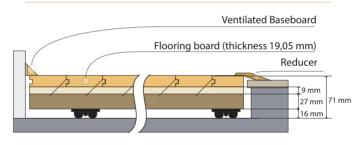

Serviceable Cable Channel



Breakout Box

