



# PLANK HARDWOOD FLOORING I TECHNICAL INFORMATION

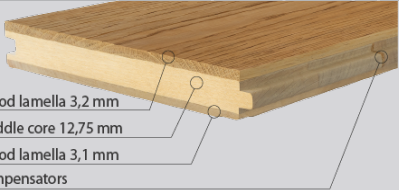
Product # 1165-3888-10






**WHITE BREATHE COLLECTION**  
**DECOR | CRYSTAL WHITE**  
**Wood species |** Oak  
**Selection |** 1 Natur  
**Constructions |** 3-layer flooring T&G  
**Size |** 19,05x300x2950 mm (3/4"x11 13/16"x9 11/16")  
**Finish |** Silk mat finish

## CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :			PACKAGING :	BOX	PALLET
Thickness	19,05 mm (3/4")		Content	1,77 m2	36 box (63,72 m2)
Width	300 mm (11 13/16")		Weigh	22 kg	815 kg
Length	2950 mm (9 11/16")		H x W x L	44 x 310 x 2 955 mm	750 x 950 x 3 000 mm
Microbevel	1 mm		Content	19,045 sq.ft.	685,627 sq.ft.
Joint type	T&G		Weigh	23 lb	840 lb
Box Content: Occasional broken row consisting from 2 planks (min 600 mm) might occur in every 2nd box			H x W x L	2" x 13" x 117" mm	30" x 38" x 119" mm

## DEVIATIONS:

Deviation on Thickness	± 0,2 mm	EN 13489 FOCT 862.3
Deviation on Length	- 50 mm	
Deviation on Width	± 0,2 mm	
Height Difference	≤ 0,2 mm on 100 mm length	EN 13489
Cup	≤ 0,2 % of width	
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	

## CHARACTERISTICS:

Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,082 m2.K/W	
Thermal conductivity	0,161 W/(m.K)	
Structural warranty	Lifetime	

## INSTALLATION :



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level.

## STORAGE AND USAGE :



— Air humidity 40% – 65%  
— Temperature +18 °C – +22 °C

## FINISH : SILK MAT FINISH

DESCRIPTION :	
Type of coating	UV-cured modified polyurethane-acrylate
Surface (finish) type	Semi-closed pores, wire brushed
Sheen	Matte, 2-5 GU/60°
Finish warranty	-

## CLASSIFICATION SURFACE CHARACTERISTICS:

Wear resistance	Not rated	EN 438-2
Scratch resistance	Not rated	EN 438
Slip resistance	50 (SRV dry)	EN 15676
Resistance to chemical agents	Class 5 (Except blue ink)	EN 13442
Repairability	Medium	

## MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with Silk finish assumes regular (daily if necessary) cleaning from dust and grit using a vacuum, followed by a thorough cleaning with Coswick Hardwood Floor Cleaner or other similar product. Floor surface areas that receive the most traffic and get worn down quicker, such as areas by the front door, hallways, kitchens etc., should be periodically renewed with special Coswick Restorative Oil. This product restores the protective surface film. Frequency of use depends on type of interior and intensity of foot traffic. For residential interiors, restorative cleaning should be done once in 3-5 years; for public and commercial interiors with intense foot traffic, it is recommended to use the product 2-4 times a year.

## SELECTION : 1 NATUR

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Non-contrasting sapwood is allowed up to 25% of board width	Bark pocket	Not limited, restored up to 100 x 10 mm
Colour variation	Permitted slight colour variation	Pith	Permitted
Knot	Permitted up to 60 mm, filled	Slope of grain	Permitted
Cracks	Permitted wide, filled	Medullary ray	Permitted

COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus

Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com

www.coswick.com

